

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/039273 A3

(51) International Patent Classification⁷: **A61B 18/14,**
A61M 25/00

Millbury, MA 01527 (US). KUONG, Darany [US/US]; 19
B Street, Lowell, MA 01851 (US).

(21) International Application Number:
PCT/US2003/034828

(74) Agent: MORRIS, James, H.; Wolf, Greenfield & Sacks,
P.C., 600 Atlantic Avenue, Boston, MA 02210 (US).

(22) International Filing Date: 31 October 2003 (31.10.2003)

(81) Designated States (*national*): JP, US.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:
60/422,707 31 October 2002 (31.10.2002) US

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant (*for all designated States except US*): C.R.
BARD, INC. [US/US]; 730 Central Avenue, Murray Hill,
NJ 07974 (US).


(88) Date of publication of the international search report:
14 October 2004

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): FALWELL, Gary,
S. [US/US]; 26 Lawrence Street, Wilmington, MA 01887
(US). MACADAM, David, P. [US/US]; 5 Cyndy Lane,

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: ELECTROPHYSIOLOGY CATHETER WITH BIASED TIP

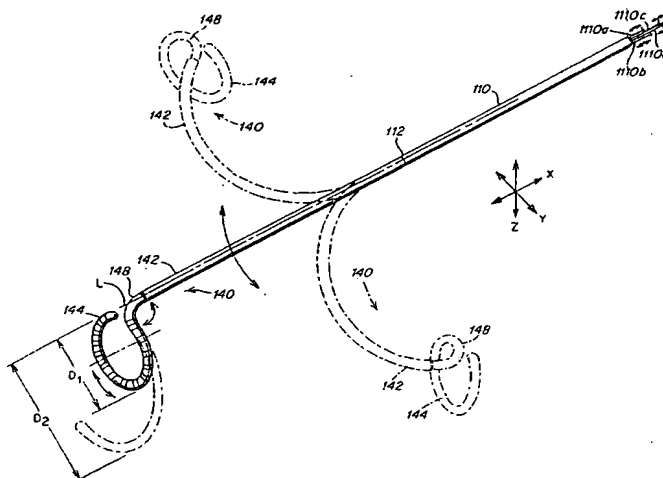

(57) Abstract: An Electrophysiology catheter including control, localization, and/or fluid delivery features, and methods of using the same. One embodiment of the invention is directed to an electrophysiology catheter including a superelastic wire which is shaped to bias the orientation of the catheter and a cable, and a method of controlling the catheter using the cable. Another embodiment is directed to an electrophysiology catheter including an adhesive to bias the orientation of the catheter. A further embodiment is directed to an electrophysiology catheter including an adhesive and one or more cables, and a method of controlling the catheter using the one or more cables. Another embodiment is directed to a method using acts of injecting a fluid into the heart of a patient and adjusting the diameter of an arcuate curve of the catheter. Further embodiments are directed to a catheter having multiple position sensors on an arcuate curve of the catheter or a position sensor associated with a movable electrode of the catheter.

WO 2004/039273 A3